




SIGN LOCATED ON EACH SIDE OF FENCING

4' W . x 6' H.
PLYWOOD (TYP)


PROVIDE VIEWING WINDOW COVERED WITH PLASTIC WEB

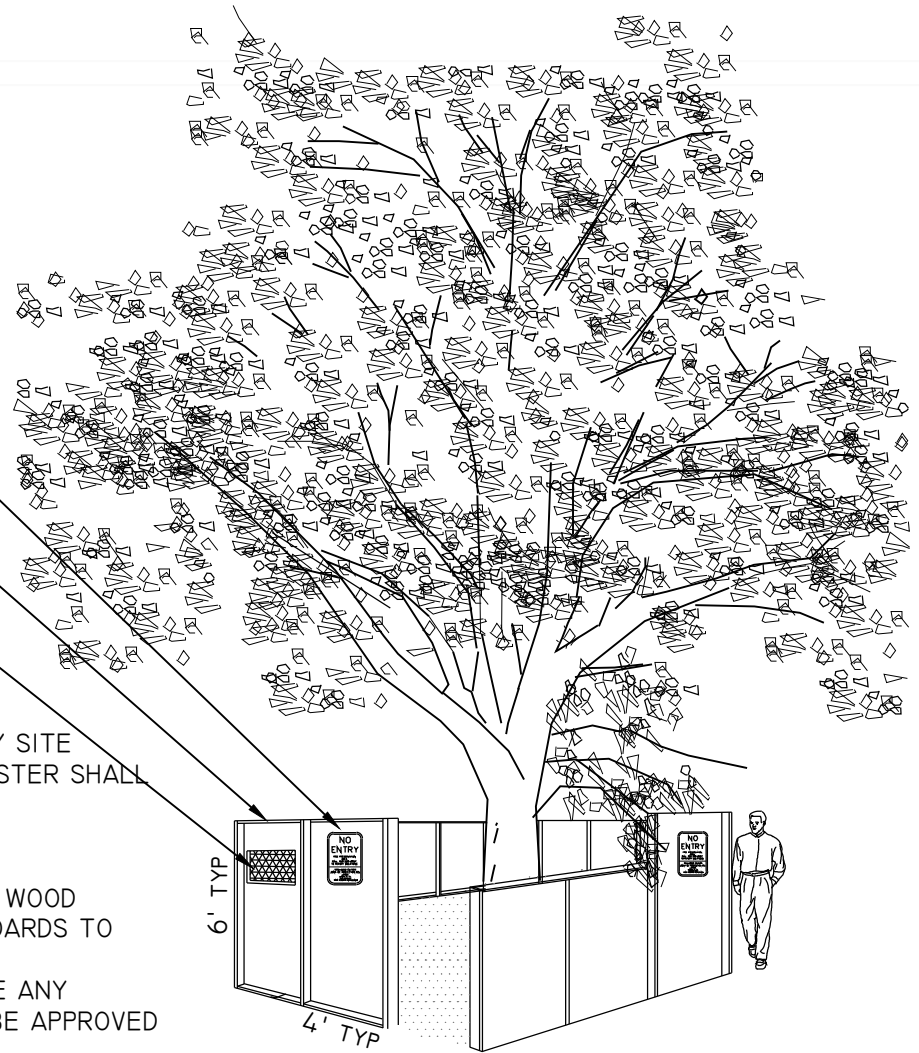

NOTES:

1. TREE PROTECTION FENCE (TPF) SHALL BE INSTALLED PRIOR TO ANY SITE WORK, CLEARING OR DEMOLITION. ARLINGTON COUNTY URBAN FORESTER SHALL BE NOTIFIED 72 HOURS PRIOR TO INSTALLATION.
2. TPF SHALL BE MAINTAINED THROUGHOUT CONSTRUCTION.
3. SIGN MATERIAL TO BE WEATHER RESISTANT.
4. TREE PROTECTION BARRIERS MUST BE CONSTRUCTED WITH A SOLID WOOD FRAME CLAD WITH PLYWOOD OR APPROVED EQUIVALENT. SECURE BOARDS TO ENSURE PROTECTION IS NOT MOVED DURING PROJECT.
5. HEIGHT OF BOARDING MAY BE LESS THAN 6 FEET TO ACCOMMODATE ANY BRANCHES THAT MAY BE LOWER. HEIGHT OF LESS THAN 6' SHALL BE APPROVED BY ARLINGTON COUNTY URBAN FORESTER.
6. REMOVE TPF ONLY WITH APPROVAL FROM ARLINGTON COUNTY URBAN FORESTER AFTER ALL SITE WORK HAS BEEN COMPLETED.
7. PROVIDE 12"(WIDTH) X 4"(HEIGHT) CUT-OUTS ALONG PANELS FACING PAVED SURFACES SUCH AS SIDEWALKS, TWO CUT-OUTS PER FENCE PANEL.

*NO PERSONNEL, VEHICLES, EQUIPMENT, CONSTRUCTION MATERIALS OR DEBRIS ALLOWED IN TREE PROTECTION AREAS WITHOUT WRITTEN CONSENT OF ARLINGTON COUNTY URBAN FORESTER.



TREE PROTECTION BARRIERS FOR RESTRICTED SPACE AND TREE PITS N.T.S.

311300.14NS (2019)