

## Dry Well Photo Requirements for Certification:

- Clear pictures of dry well length, width and depth.
- Filter fabric installed on sides with excess on top to overlap stone (no fabric on the bottom of the dry well).
- Clear pictures of perforated pipe (in the stone layer only) installed.
- Clear pictures of #57 stone depth.
- Photo of fabric covering the stone layer.
- The pipe extending into the soil layer must not be perforated.
- A final photo showing the pop-up emitter installed with sod/grass covering the dry well.

*Provide receipts for materials used, including (but not limited to):*

- #57 stone
- Geotextile

*\*Remember: Drywell construction must follow the approved plan.*



*Send As-built Certifications for review to:  
StormwaterReview@arlingtonva.us*

*Photos submitted to Arlington County become the property of Arlington County.*

## Dry Well Requirements

Soil and Structure Consulting, Inc.



Stormwater Management Facility  
Construction Certification Requirements Guidelines



Soil and Structure Consulting, Inc.

**Clear depth measurements. Label all drywell photos if more than one.**



Soil and Structure Consulting, Inc.

**Clear length and width measurements.**



Soil and Structure Consulting, Inc.

**Fabric installed and perforated pipe installed.**




Soil and Structure Consulting, Inc.

**Photo of #57 stone installed**



Soil and Structure Consulting, Inc.

**#57 stone wrapped**

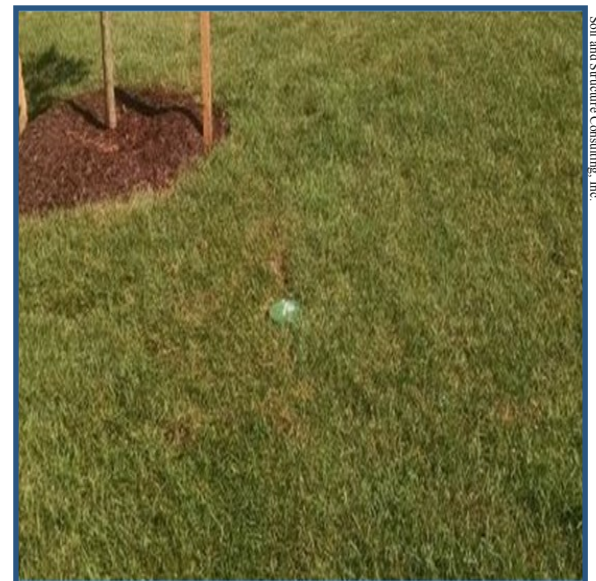

Soil and Structure Consulting, Inc.

**Sod and pop-up emitter installed**